



Porsche	924	2.0	Turbo
		2.5	S
	944	2.5	
		2.5	S
		3.0	S2

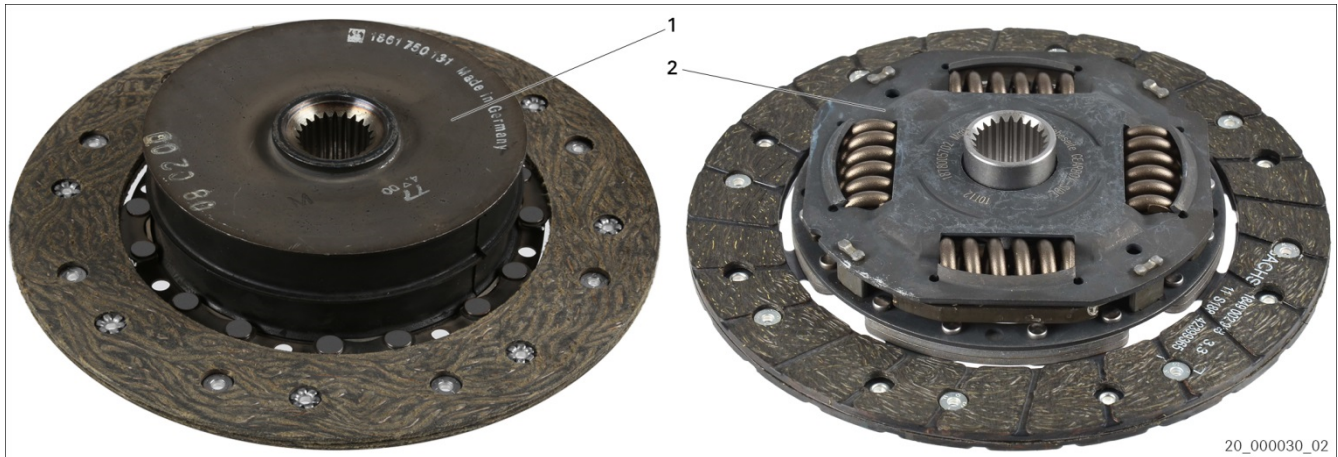


Fig. 1: Clutch disks, Porsche

1 Rubber torsional damper

2 Torsional damper with springs

In cooperation with Porsche, all clutch disks were converted from rubber torsional dampers (1) to torsional dampers with springs (2). Despite the great visual differences, all dimensions and functions are identical. The clutch disk can be installed without any restrictions.



Before installing, measure the lateral run-out of the clutch disk and align as needed (0.5 mm max.).

Observe Service Information: Clutch disk - Check lateral run-out (12012 EN).



Observe Service Information: Clutch Installation in Passenger Cars and Commercial Vehicles - Greasing the hub spline (11560 EN).



[www.zf.com/serviceinformation](http://www.zf.com/serviceinformation)